

15 18 WINDOW VAN

**Best in Value** 

**Versatile & Practical** 

**Dual Sliding Door** 

Powerful 3.0L CDTi Engine

#### **STYLING**











# DRIVING









## INTERIOR







#### POWERTRAIN




DISPLACEMENT	3.0L
RATED OUTPUT (kW(HP)/rpm)	110 (148)/3400
MAX TORQUE (N.m/rpm)	370/2000
COMPRESSION RATIO	17.3:1





### **DK5 ENGINE**

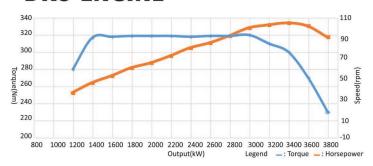

т	TRANSMISSION		GEAR RATIO					
"	TANSIVIISSION	1 2 3 4 5 R						
3.0L	5 SPEED MANUAL	4.313	2.330	1.436	1.000	0.838	4.220	

#### SAFETY



**Head Collision** 



**Rear Collision** 




**Rollover Test** 







**Lateral Static Pressure** 



**Electronic type ABS:** 

ABS (Anti-lock Brake System) can protect the wheel being locked or slipped to ensure the valid braking under different ground conditions.

**EBD** (Electronic Brake Force Distribution): It can detect, automatically, the load of front and back wheels, rotation differences, or wheel locking by electronic means, and distribute ideal brake forces at proper time.

Monocoque type vehicle body:

- 1. High-strength swaybars
- 2. Buffer Beams

# **Specification**





ENGINE		
Engine	DK5	
Engine Type	In Line 4 Cyclinder Commonrail Turbo Charge With Intercooler Diesel Engine	
Bore x Stroke	96 x 103	
Emission Standard	Euro III	
Displacement (L)	2.982L	
Rated Output (kW(HP)/RPM)	110(148)/3400	
Max. Torque (N.M/R.P.M)	370/2000	
Compression Ratio	17.3:1	
Top Speed *	135 km/h	
Fuel Standard	Euro-III Diesel or Above	
Fuel Tank Capacity (L)	70 Litre	
DRIVING SYSTEM		

DRIVING SYSTEM	
Transmission Type	Manual 5-Speed
Gear Ratio	1st: 4.313, 2nd: 2.330, 3rd: 1.436, 4th: 1.000, 5th:0.838, Reverse: 4.220
Clutch	Single Disc, Hydraulic Control
Driving Type	Front Engine, Rear Drive
Brake System	ABS+EBD, Intelligent Brake Assisance System
	Front Disc & Rear Drum
Suspension	Front Transverse Double Wishbone
	Independent Suspension Rear 4

TECHNICAL DIMENSION				
Overall LxWxH (mm)	5470 x 1885 x 2285	5998 x 1885 x 2285		
Wheelbase (mm)	3110	3720		
Ground Clearance (mm)	169			
Gross Vehicle Weight (kg)	3500	4000		
Curb Weight (kg)*	2415	2680		
Seating Capacity	15 Seats	18 Seats		
Tire	205R/15C	215/75R16C		
Minimum Turning Radius (m)	12.2	14.5		

Ply Leaf Spring

ocuting oupdoity	10 00013	10 0000
Tire	205R/15C	215/75R16C
Minimum Turning Radius (m)	12.2	14.5
FEATURES AND ACCESSORIES		
Audio Systems	DVD+SD	Card Slot
Stereo Speaker	6	pcs
Reverse Camera	•	•
Reverse Sensor	•	•
Cabin Light	•	•
Seat Material	Black	PU & Lint
Last Row Hanging Seat	•	•
Intermittent Front Wiper, Rear Wiper	•	•
Rear Windscreen with Demister	•	•
Tiltable Steering Wheel	•	•
Central Locking	•	•
Remote Control	•	•
Side Mirror with LED Turning Signal Lamp	•.	•
Side Mirror Adjustment	Po	wer
High-Mounted 3rd Brake Lamp	•	•
Projection Headlamp with DRL	•	•
Front Fog Lamp	•	•
Wheel Size	15" Alloy	16" Alloy
Air-Conditioner - Front	•	•
Air-Conditioner - Rear	6 Air Vents	9 Air Vents
Rear Evaporator	Do	uble
Middle Console Box with 3 Cup Holder	•	•
Luxury PVC Roof Lining	•	•
Side Window	4 Sli	ding
PVC Floor Mat	•	•
Power Window - Driver & Co-driver	•	•
Anti-Glare Rear View Mirror	•	•
Seat Belt	•	•

\*Data collected under testing conditions. The final results may differ due to different driving conditions, overall vehicle weight etc.

















# COMFORTABLE PEOPLE TRANSPORTER



PRIVATE LIMOUSINE




HIRE & DRIVE




BAS PERSIARAN



WHEELCHAIR LIFT



Side View (5.4m)



Model	Overall Length	Wheelbase (W/B)	FOH	ROH
KINGO	5470mm	3110mm	1250mm	1110mm
KINGO PLUS	5998mm	3720mm	1190mm	1088mm

Branch / Dealer Chop:





